ALUZION
ARCHITECTURAL SIDING

PRODUCT CATALOGUE

ELEGANT
SUSTAINABLE
AFFORDABLE

TABLE OF CONTENTS

PRODUCT CHARACTERISTICS

SIDINGS

SOFFITS

ACCESSORIES

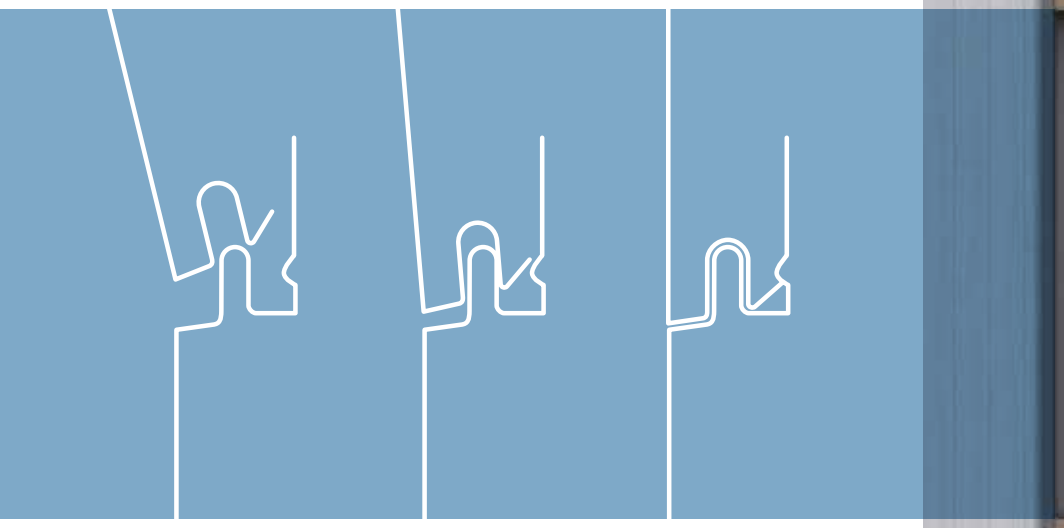

INSPIRED BY THE NATURAL GRAIN OF WOOD, ALUZION SIDING COMBINES HIGH-END ELEGANCE WITH EXCEPTIONAL PERFORMANCE, INCLUDING OUTSTANDING WEATHER RESISTANCE.

Lightweight, easy to install and requiring very little maintenance, this cladding is available in two distinct collections to satisfy all of your design requirements:

With its exclusive INO-CLIP fastening system, ensures more secure installation and a refined, contemporary finish.

Lightweight, easy to install and requiring very little maintenance, this cladding is available in two distinct collections to satisfy all of your design requirements:

All Aluzion sidings and accessories feature these characteristics:

- 100% Aluminum & Recyclable
- UV Resistant, Non-Combustible & Corrosion Resistant
- Non-Porous, Insect-Proof & Low Maintenance
- Lightweight & Easy to install
- 25-year Warranty
- Can be installed vertically & horizontally

5” SMOOTH PLANK

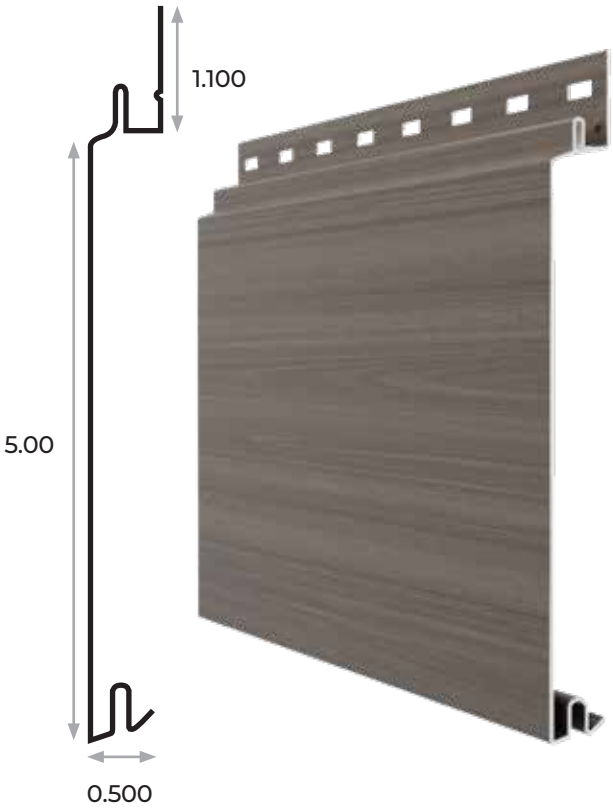

Aluminum Alloy	Serie AA3000
Aluminum Thickness	0.76 mm
Type of Paint	M-Series Super Polyester
Coating System	2 to 3 Coats Depending on Color
Paint Thickness	29 to 35 Microns Depending on Color
Paint Finish	Wood Imitation or Solid Color
Texture Finish	Smooth, Vented Embossed

Size Specifications

- 5 Inches Exposure
- 12 Feet Length
- 5 Square Feet per unit

Packaging Specification

20 sheets per box = 100 square feet
1 box = 75 lbs
30 boxes per pallet = 2,350 lbs

PALLET DIMENSIONS
Length: 146” | Width: 46” | Height: 36”

Available Colors

WOOD IMITATION COLORS

- **Willow** | Multi-Tone and Single-Tone
- **Jatoba** | Multi-Tone and Single-Tone
- **Makore** | Multi-Tone and Single-Tone
- **Ash** | Multi-Tone and Single-Tone
- **Smoked Eucalyptus** | Multi-Tone and Single-Tone
- **Birch** | Single-Tone only
- **African Ebony** | 1 shade per box

SOLID COLORS

- **Iron Ore**
- **Raven Black**
- **Slate**
- **White**

ACCREDITATIONS

CAN-CGSB-93.2,
CAN-CGSB-93.1 Compliant
AAMA 1402 Compliant
ASTM E330 Testing in Progress
ASTM E84 Testing in Progress
CAN/ULC-S102 Testing in Progress
Windload Tested until 2000 KPA

5” SMOOTH PLANK - VENTED OPTION

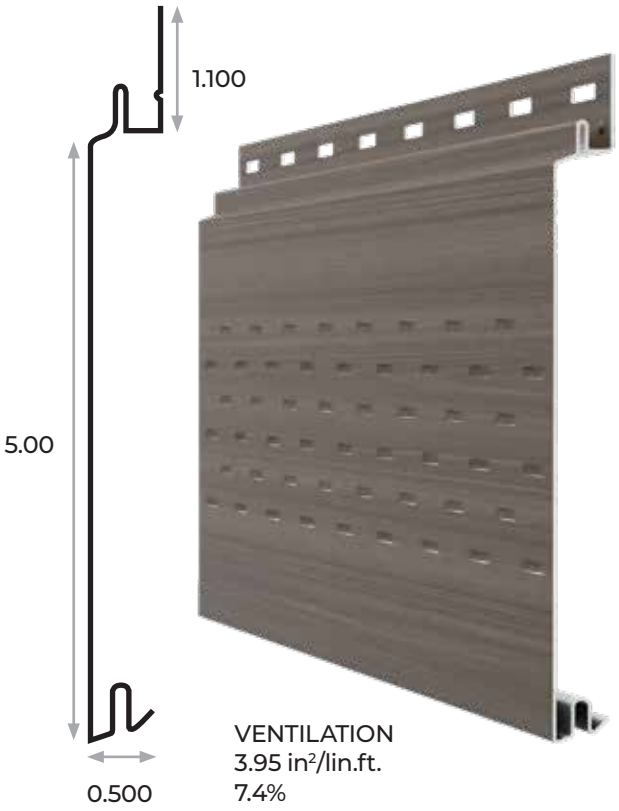

Aluminum Alloy	Serie AA3000
Aluminum Thickness	0.76 mm
Type of Paint	M-Series Super Polyester
Coating System	2 to 3 Coats Depending on Color
Paint Thickness	29 to 35 Microns Depending on Color
Paint Finish	Wood Imitation or Solid Color
Texture Finish	Smooth or Embossed

Size Specifications

- 5 Inches Exposure
- 12 Feet Length
- 5 Square Feet per unit

Packaging Specification

20 sheets per box = 100 square feet
1 box = 75 lbs
30 boxes per pallet = 2,350 lbs

PALLET DIMENSIONS
Length: 148” | Width: 46” | Height: 36”

Available Colors

WOOD IMITATION COLORS

Willow | Multi-Tone and Single-Tone

Jatoba | Multi-Tone and Single-Tone

Makore | Multi-Tone and Single-Tone

Ash | Multi-Tone and Single-Tone

Smoked Eucalyptus | Multi-Tone and Single-Tone

Birch | Single-Tone only

African Ebony | 1 shade per box

SOLID COLORS

Iron Ore

Raven Black

Slate

White

ACCREDITATIONS

CAN-CGSB-93.2,
CAN-CGSB-93.1 Compliant
AAMA 1402 Compliant
Windload Tested until 2000 KPA

½” J-CHANNEL FOR SIDING

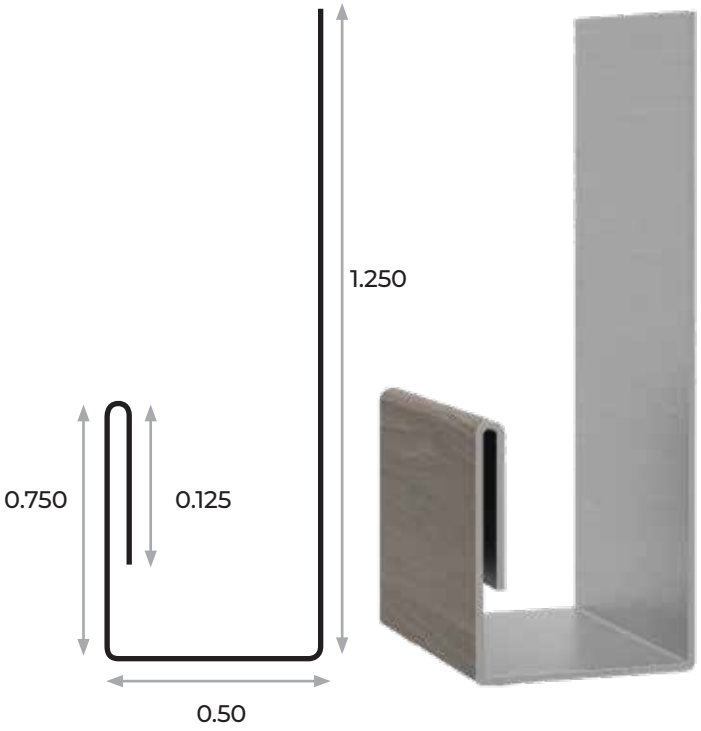

Aluminum Alloy	Serie AA3000
Aluminum Thickness	0.66 mm
Aluminum Casting	CC Process
Type of Paint	M-Series Super Polyester
Coating System	2 to 3 Coats Depending on Color
Paint Thickness	29 to 35 Microns Depending on Color
Paint Finish	Wood Imitation or Solid Color
Texture Finish	Smooth

Size Specifications

- 3/4 Inches Exposure
- 12 Feet Length

Packaging Specification

20 units per box = 240 Linear Feet
1 box = 25 lbs

Available Colors

WOOD IMITATION COLORS

- **Willow**
- **Jatoba**
- **Makor**
- **Ash**
- **Smoked Eucalyptus**
- **Birch**
- **African Ebony**

SOLID COLORS

- **Iron Ore**
- **Raven Black**
- **Slate**
- **White**

MODERN OUTSIDE CORNER

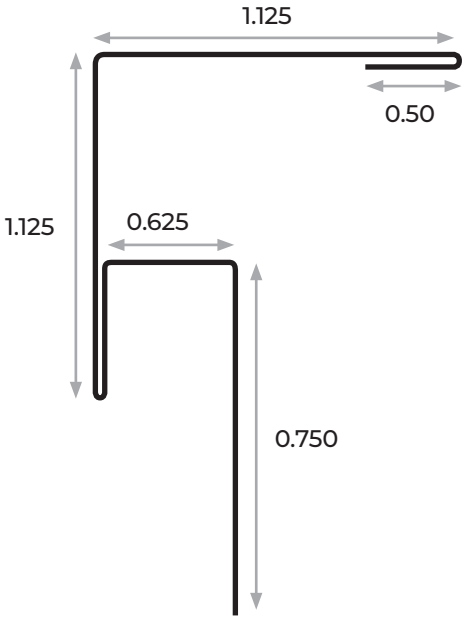

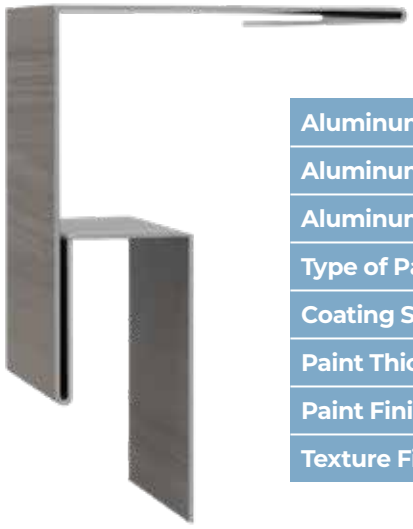

Aluminum Alloy	Serie AA3000
Aluminum Thickness	0.76 mm
Aluminum Casting	CC Process
Type of Paint	M-Series Super Polyester
Coating System	2 to 3 Coats Depending on Color
Paint Thickness	29 to 35 Microns Depending on Color
Paint Finish	Wood Imitation or Solid Color
Texture Finish	Smooth

Size Specifications

- 2.5 Inches Exposure
- 10 Feet Length

Packaging Specification

5 units per box = 50 Linear Feet
1 box = 12 lbs

Available Colors

WOOD IMITATION COLORS

- **Willow**
- **Jatoba**
- **Makor**
- **Ash**
- **Smoked Eucalyptus**
- **Birch**
- **African Ebony**

SOLID COLORS

- **Iron Ore**
- **Raven Black**
- **Slate**
- **White**

TRADITIONAL OUTSIDE CORNER

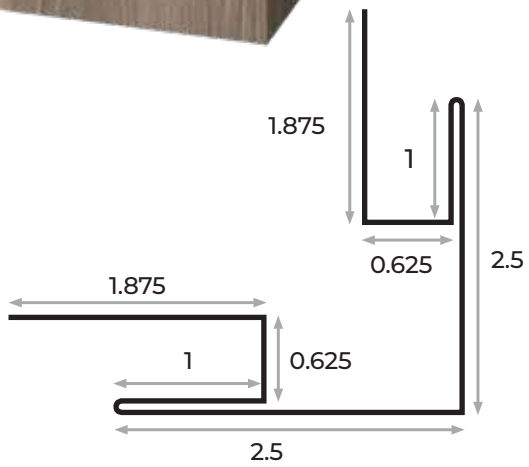

Aluminum Alloy	Serie AA3000
Aluminum Thickness	0.66 mm
Aluminum Casting	CC Process
Type of Paint	M-Series Super Polyester
Coating System	2 to 3 Coats Depending on Color
Paint Thickness	29 to 35 Microns Depending on Color
Paint Finish	Wood Imitation or Solid Color
Texture Finish	Smooth

Size Specifications

- 2.5 Inches Exposure
- 10 Feet Length

Packaging Specification

5 units per box = 50 Linear Feet
1 box = 20 lbs

Available Colors

WOOD IMITATION COLORS

- **Willow**
- **Jatoba**
- **Makor**
- **Ash**
- **Smoked Eucalyptus**
- **Birch**
- **African Ebony**

SOLID COLORS

- **Iron Ore**
- **Raven Black**
- **Slate**
- **White**

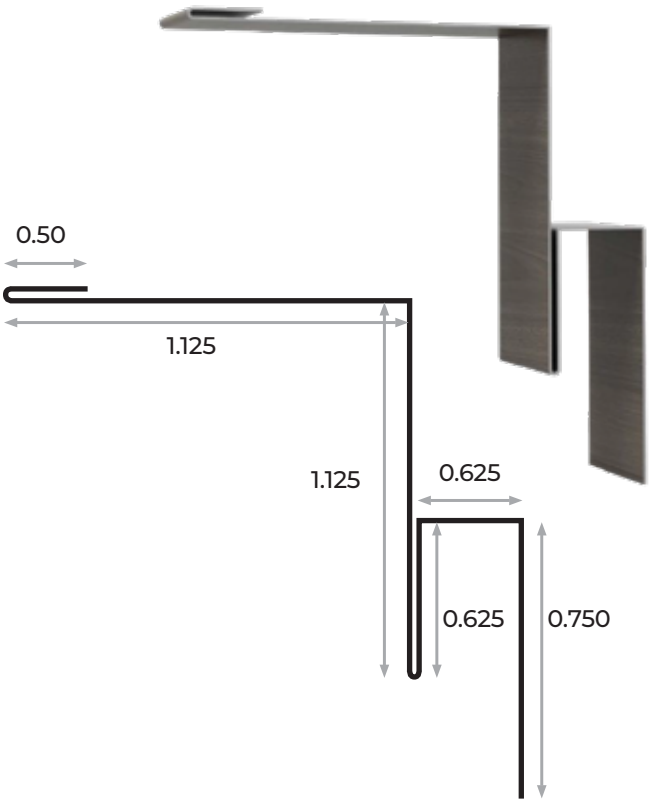

Aluminum Alloy	Serie AA3000
Aluminum Thickness	0.66 mm
Aluminum Casting	CC Process
Type of Paint	M-Series Super Polyester
Coating System	2 to 3 Coats Depending on Color
Paint Thickness	29 to 35 Microns Depending on Color
Paint Finish	Wood Imitation or Solid Color
Texture Finish	Smooth

Size Specifications

- 1.125 Inches Exposure
- 10 Feet Length

Packaging Specification

5 units per box = 50 Linear Feet
1 box = 12 lbs

Available Colors

WOOD IMITATION COLORS

- **Willow**
- **Jatoba**
- **Makor**
- **Ash**
- **Smoked Eucalyptus**
- **Birch**
- **African Ebony**

SOLID COLORS

- **Iron Ore**
- **Raven Black**
- **Slate**
- **White**

TRADITIONAL INSIDE CORNER

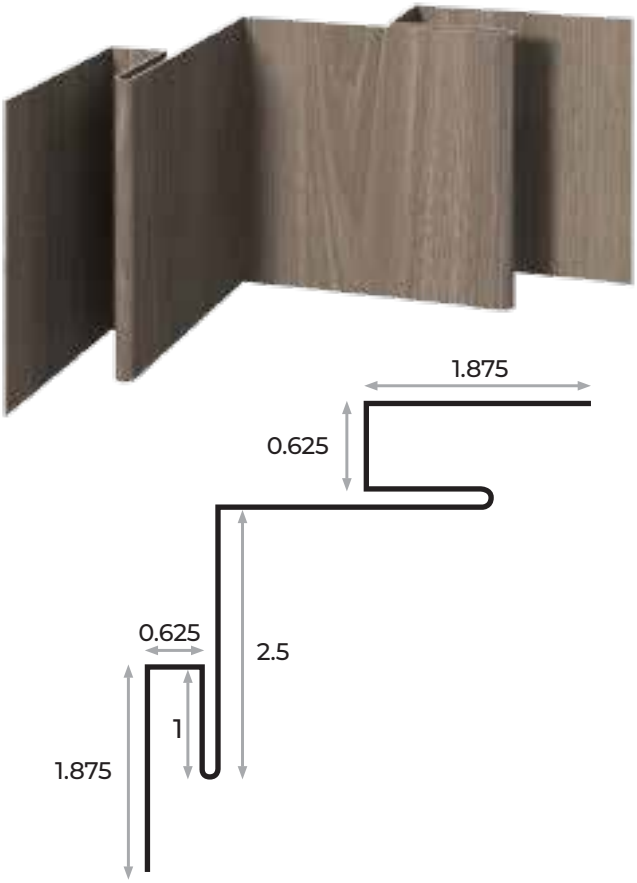

Aluminum Alloy	Serie AA3000
Aluminum Thickness	0.66 mm
Aluminum Casting	CC Process
Type of Paint	M-Series Super Polyester
Coating System	2 to 3 Coats Depending on Color
Paint Thickness	29 to 35 Microns Depending on Color
Paint Finish	Wood Imitation or Solid Color
Texture Finish	Smooth

Size Specifications

- 2.5 Inches Exposure
- 10 Feet Length

Packaging Specification

5 units per box = 50 Linear Feet
1 box = 20 lbs

Available Colors

WOOD IMITATION COLORS

- **Willow**
- **Jatoba**
- **Makor**
- **Ash**
- **Smoked Eucalyptus**
- **Birch**
- **African Ebony**

SOLID COLORS

- **Iron Ore**
- **Raven Black**
- **Slate**
- **White**

VERTICAL TRANSITION MOULDING

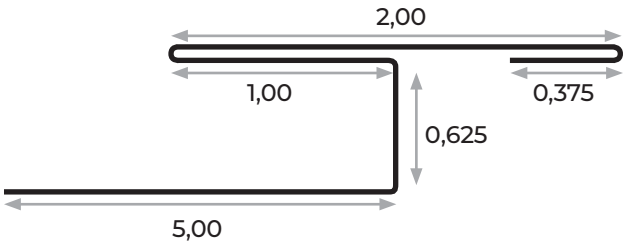

Aluminum Alloy	Serie AA3000
Aluminum Thickness	0.66 mm
Aluminum Casting	CC Process
Type of Paint	M-Series Super Polyester
Coating System	2 to 3 Coats Depending on Color
Paint Thickness	29 to 35 Microns Depending on Color
Paint Finish	Wood Imitation or Solid Color
Texture Finish	Smooth

Size Specifications

- 2 Inches Exposure
- 10 Feet Length

Packaging Specification

5 units per box = 50 Linear Feet
1 box = 12 lbs

Available Colors

WOOD IMITATION COLORS

- **Willow**
- **Jatoba**
- **Makor**
- **Ash**
- **Smoked Eucalyptus**
- **Birch**
- **African Ebony**

SOLID COLORS

- **Iron Ore**
- **Raven Black**
- **Slate**
- **White**

HORIZONTAL TRANSITION MOULDING

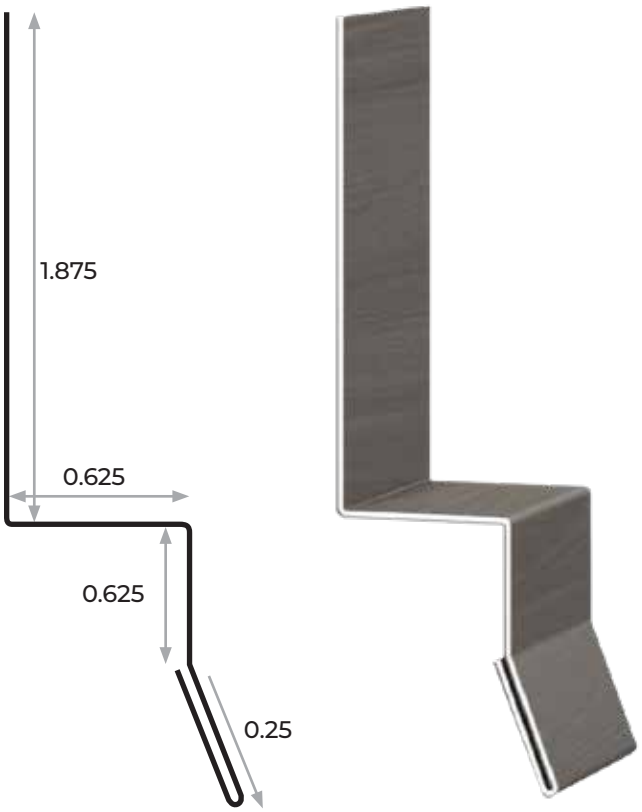

Aluminum Alloy	Serie AA3000
Aluminum Thickness	0.66 mm
Aluminum Casting	CC Process
Type of Paint	M-Series Super Polyester
Coating System	2 to 3 Coats Depending on Color
Paint Thickness	29 to 35 Microns Depending on Color
Paint Finish	Wood Imitation or Solid Color
Texture Finish	Smooth

Size Specifications

- 2 Inches Exposure
- 10 Feet Length

Packaging Specification

5 units per box = 50 Linear Feet
1 box = 12 lbs

Available Colors

WOOD IMITATION COLORS

- **Willow**
- **Jatoba**
- **Makor**
- **Ash**
- **Smoked Eucalyptus**
- **Birch**
- **African Ebony**

SOLID COLORS

- **Iron Ore**
- **Raven Black**
- **Slate**
- **White**

1 ¼”DRIP CAP

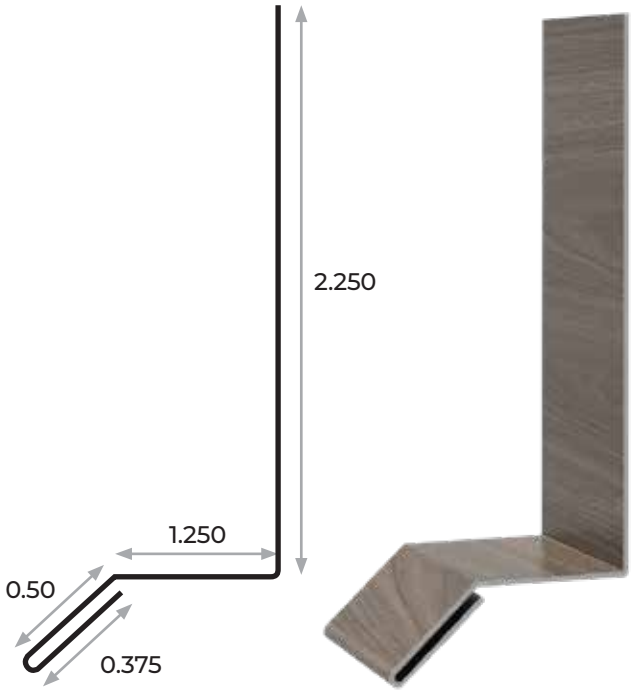

Aluminum Alloy	Serie AA3000
Aluminum Thickness	0.66 mm
Aluminum Casting	CC Process
Type of Paint	M-Series Super Polyester
Coating System	2 to 3 Coats Depending on Color
Paint Thickness	29 to 35 Microns Depending on Color
Paint Finish	Wood Imitation or Solid Color
Texture Finish	Smooth

Size Specifications

- 1.25 Inches Exposure
- 10 Feet Length

Packaging Specification

10 units per box = 100 Linear Feet
1 box = 16 lbs

Available Colors

WOOD IMITATION COLORS

- **Willow**
- **Jatoba**
- **Makor**
- **Ash**
- **Smoked Eucalyptus**
- **Birch**
- **African Ebony**

SOLID COLORS

- **Iron Ore**
- **Raven Black**
- **Slate**
- **White**

1 ¾”DRIP CAP

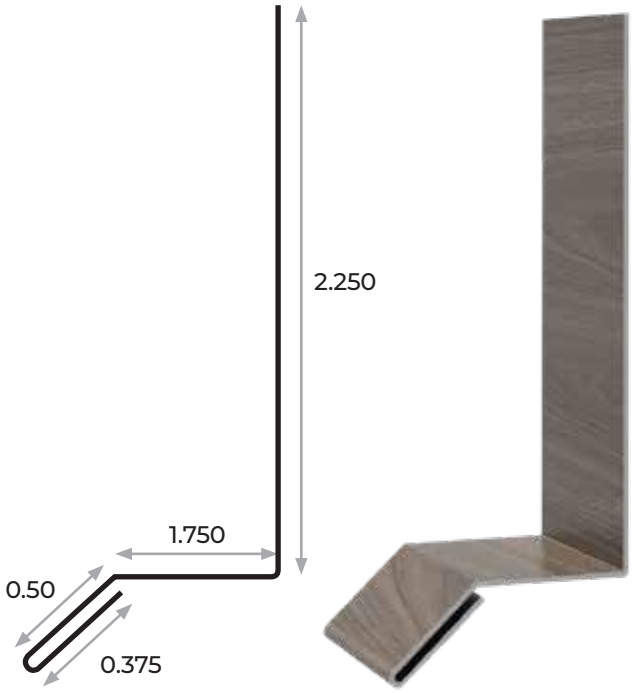

Aluminum Alloy	Serie AA3000
Aluminum Thickness	0.66 mm
Aluminum Casting	CC Process
Type of Paint	M-Series Super Polyester
Coating System	2 to 3 Coats Depending on Color
Paint Thickness	29 to 35 Microns Depending on Color
Paint Finish	Wood Imitation or Solid Color
Texture Finish	Smooth

Size Specifications

- 1.75 Inches Exposure
- 10 Feet Length

Packaging Specification

10 units per box = 100 Linear Feet
1 box = 18 lbs

Available Colors

WOOD IMITATION COLORS

- **Willow**
- **Jatoba**
- **Makor**
- **Ash**
- **Smoked Eucalyptus**
- **Birch**
- **African Ebony**

SOLID COLORS

- **Iron Ore**
- **Raven Black**
- **Slate**
- **White**

VENTED STARTER STRIP

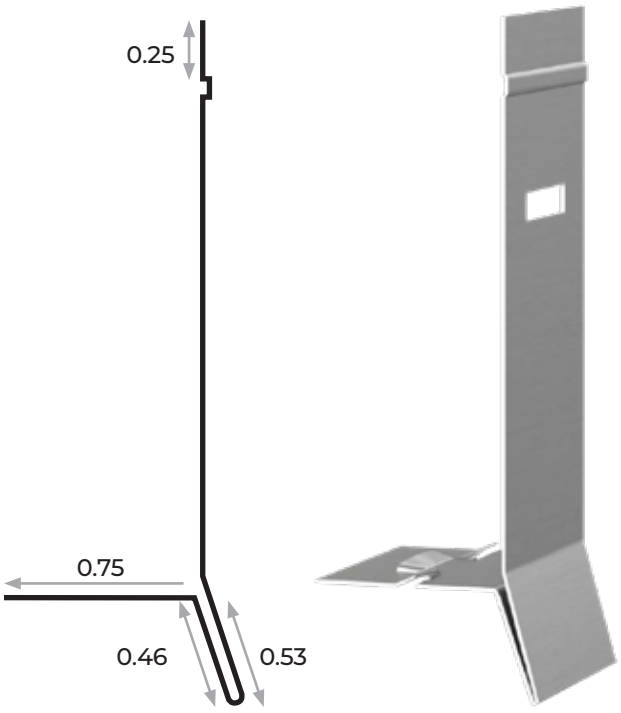

Aluminum Alloy	Serie AA3000
Aluminum Thickness	0.55 mm
Aluminum Casting	CC Process
Type of Paint	Polyester
Coating System	1 coat Transparent primer
Paint Thickness	8 microns
Paint Finish	Transparent Primer
Texture Finish	Smooth

Size Specifications

- 10 Feet Length

Packaging Specification

20 units per box = 200 Linear Feet
1 box = 20 lbs

NON VENTED STARTER STRIP

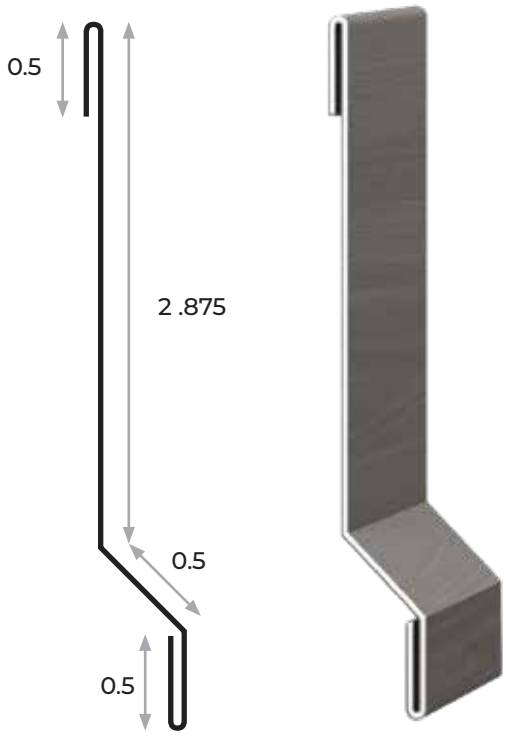

Aluminum Alloy	Serie AA3000
Aluminum Thickness	0.47 mm
Aluminum Casting	CC Process
Type of Paint	Polyester
Coating System	1 coat Transparent primer
Paint Thickness	8 microns
Paint Finish	Transparent Primer
Texture Finish	Smooth

Size Specifications

- 10 Feet Length

Packaging Specification

25 units per box = 250 Linear Feet
1 box = 30 lbs

Product is shown with paint but will come with or without paint. This is not important as the product is used behind the siding and therefore not visible.

FLATSTOCK 24” X 15M

Aluminum Alloy	Serie AA3000
Aluminum Thickness	0.66 mm
Aluminum Casting	DC Process
Type of Paint	M-Series Super Polyester
Coating System	2 to 3 Coats Depending on Color
Paint Thickness	29 to 35 Microns Depending on Color
Paint Finish	Wood Imitation or Solid Color
Texture Finish	Smooth or Embossed

Size Specifications

- 24 Inches Wide
- 15 Meter Length

Packaging Specification

1 unit per box = 98 square feet
1 box =38 lbs
16 boxes per pallet = 650 lbs

PALLET DIMENSIONS
Length: 48” | Width: 48” | Height: 28”

Available Colors

WOOD IMITATION COLORS

- **Willow**
- **Jatoba**
- **Makor**
- **Ash**
- **Smoked Eucalyptus**
- **Birch**
- **African Ebony**

SOLID COLORS

- **Iron Ore**
- **Raven Black**
- **Slate**
- **White**

4-PANEL SOFFIT

VENTED OR SOLID

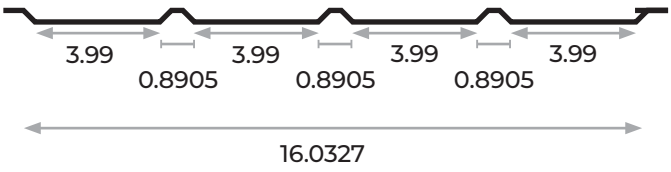

Aluminum Alloy	Serie AA3000
Aluminum Thickness	0.41 mm
Aluminum Casting	DC Process
Type of Paint	M-Series Super Polyester
Coating System	2 to 3 Coats Depending on Color
Paint Thickness	29 to 35 Microns Depending on Color
Paint Finish	Wood Imitation
Texture Finish	Smooth

Size Specifications

- 16 Inches Exposure
- 12 Feet Length
- 16 Square Feet per Unit

Packaging Specification

12 sheets per box = 192 square feet
1 box = 58 lbs
26 boxes per pallet = 1,600 lbs

PALLET DIMENSIONS
Length: 148” | Width: 46” | Height: 36”

VENTILATION
Soffit Section per Lineal Foot ≈ 7.14 sq.in.
Per Square Foot ≈ 5.37 sq. in.

Available Colors

WOOD IMITATION COLORS

- **Ash**
- **Birch**
- **Jatob**
- **Makore**
- **Smoked Eucalyptus**
- **Willow**

7/16" J-CHANNEL FOR SOFFIT

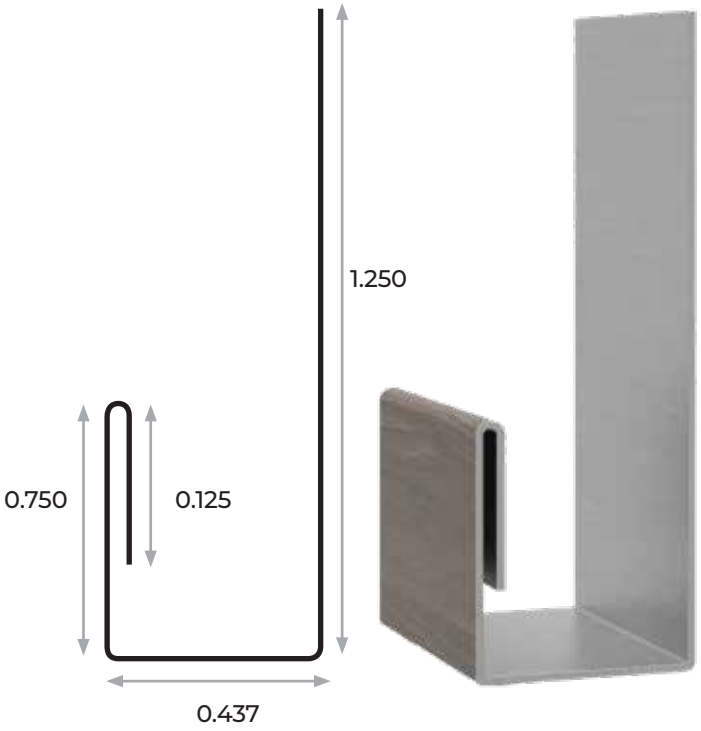

Aluminum Alloy	Serie AA3000
Aluminum Thickness	0.66 mm
Aluminum Casting	CC Process
Type of Paint	M-Series Super Polyester
Coating System	2 to 3 Coats Depending on Color
Paint Thickness	29 to 35 Microns Depending on Color
Paint Finish	Wood Imitation
Texture Finish	Smooth

Size Specifications

- 3/4 Inches Exposure
- 12 Feet Length

Packaging Specification

25 units per box = 300 Linear Feet
1 box = 19 lbs

Available Colors

WOOD IMITATION COLORS

- **African Ebony**
- **Ash**
- **Birch**
- **Jatoba**
- **Makore**
- **Smoked Eucalyptus**
- **Willow**

FASCIA BOARD

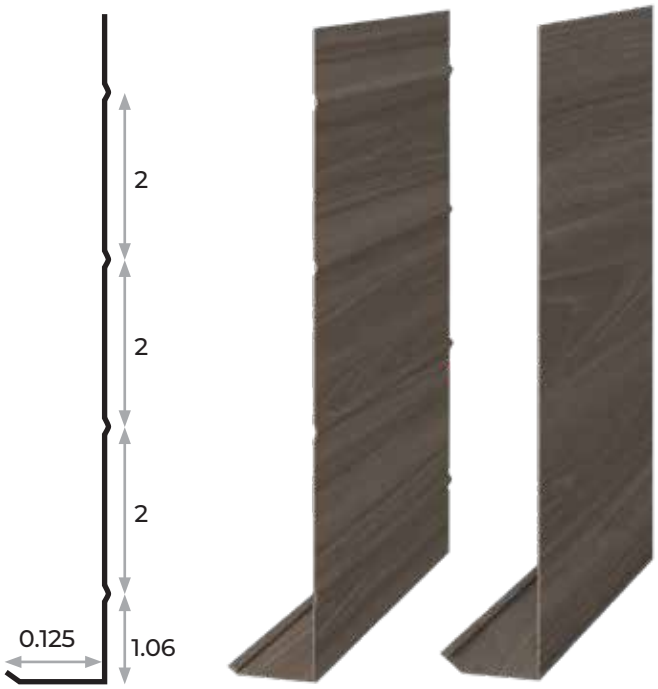

Aluminum Alloy	Serie AA3000
Aluminum Thickness	0.41 mm
Aluminum Casting	CC Process
Type of Paint	M-Series Super Polyester
Coating System	2 to 3 Coats Depending on Color
Paint Thickness	29 to 35 Microns Depending on Color
Paint Finish	Wood Imitation
Texture Finish	Smooth

Size Specifications

- 6 or 8 Inches Exposure
- 10 Feet Length

Packaging Specification

20 units per box = 200 Linear Feet
1 box of 6" Fascia = 33 lbs
1 box of 8" Fascia = 41 lbs

Available Colors

WOOD IMITATION COLORS

- **African Ebony**
- **Ash**
- **Birch**
- **Jatoba**
- **Makore**
- **Smoked Eucalyptus**
- **Willow**

1 ¼” L-TRIM FOR SOFFIT

Aluminum Alloy	Serie AA3000
Aluminum Thickness	0.41mm
Aluminum Casting	CC Process
Type of Paint	M-Series Super Polyester
Coating System	2 to 3 Coats Depending on Color
Paint Thickness	29 to 35 Microns Depending on Color
Paint Finish	Wood Imitation or Solid Color
Texture Finish	Smooth

Size Specifications

- 1.25 Inches Exposure
- 10 Feet Lenght

Packaging Specification

25 units per box = 250 Linear Feet
1 box = 35 lbs

Available Colors

WOOD IMITATION COLORS

- **African Ebony**
- **Ash**
- **Birch**
- **Jatoba**
- **Makore**
- **Smoked Eucalyptus**
- **Willow**

SOLID COLORS

- **Iron Ore**
- **Raven Black**
- **Slate**
- **White**

ALUZION
ARCHITECTURAL SIDING

MONTREAL | Head Office
O.A.M. BUILDING PRODUCTS INC.
4, rue du Moulin
Saint-André-d'Argenteuil
(Québec) J0V 1X0
1 450 983-3766 | info@oam-inc.ca

TORONTO | Distribution center
O.A.M. BUILDING PRODUCTS INC.
5261 Bradco Blvd., Unit 1
Mississauga
(Ontario) L4W 2A6
1 905 625-6669 | mississauga@oam-inc.ca